


### SECTION A-A



### NOTES:

1. Drive to be minimum 50' from PT of intersection & 12' minimum from a property line.
2. Entire entrance including gutter and apron shall be poured monolithically.
3. Width of curb & gutter shall match width of existing curb & gutter.
4. Street type driveways are permitted.
5. Entrance width and radius shall be sized to accommodate turning radius of proposed trucks to/from site development.

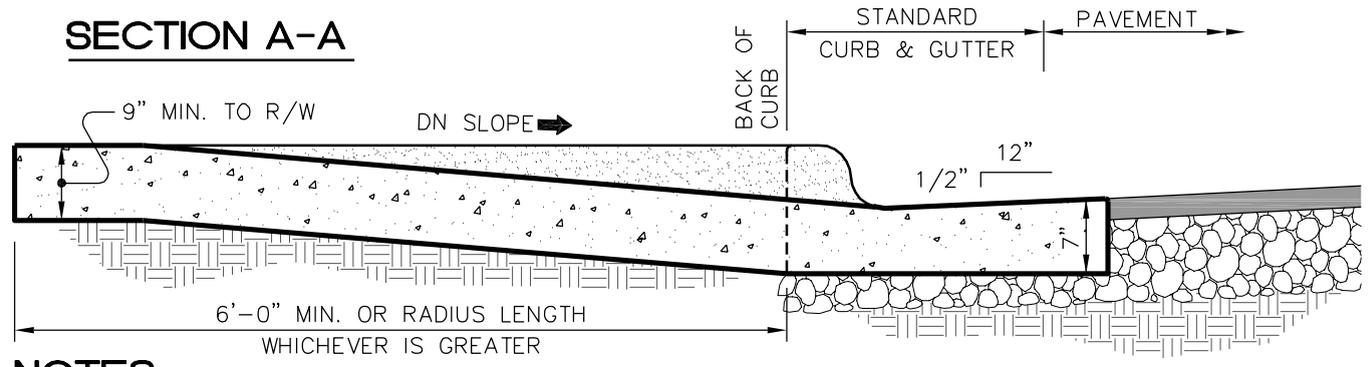

## TOWN of CLAYTON

USE WITH THE TOWN of CLAYTON STANDARD SPECIFICATIONS ONLY

# COMMERCIAL CONCRETE DRIVEWAY CONNECTION

SCALE: Not To Scale	DETAIL # 2404.02
REVISION DATE: July, 2010	SHEET #: 1 of 1