
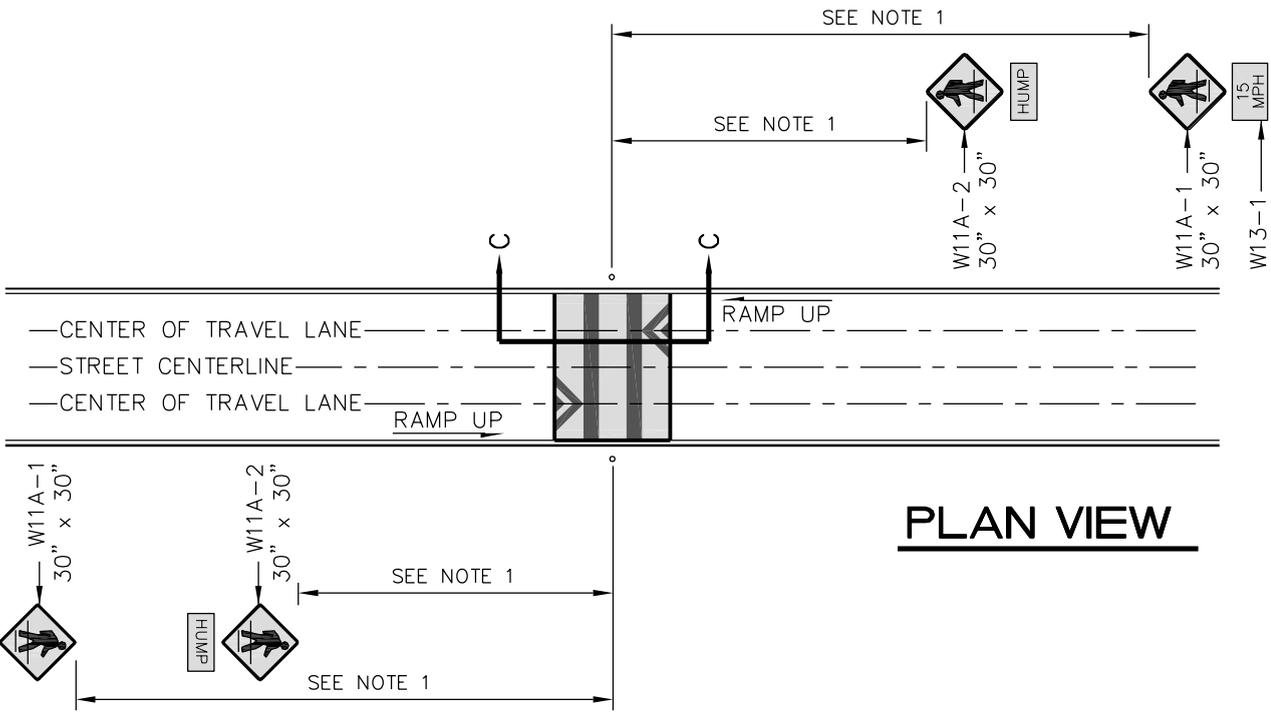


SECTION A-A PARABOLIC CROWN

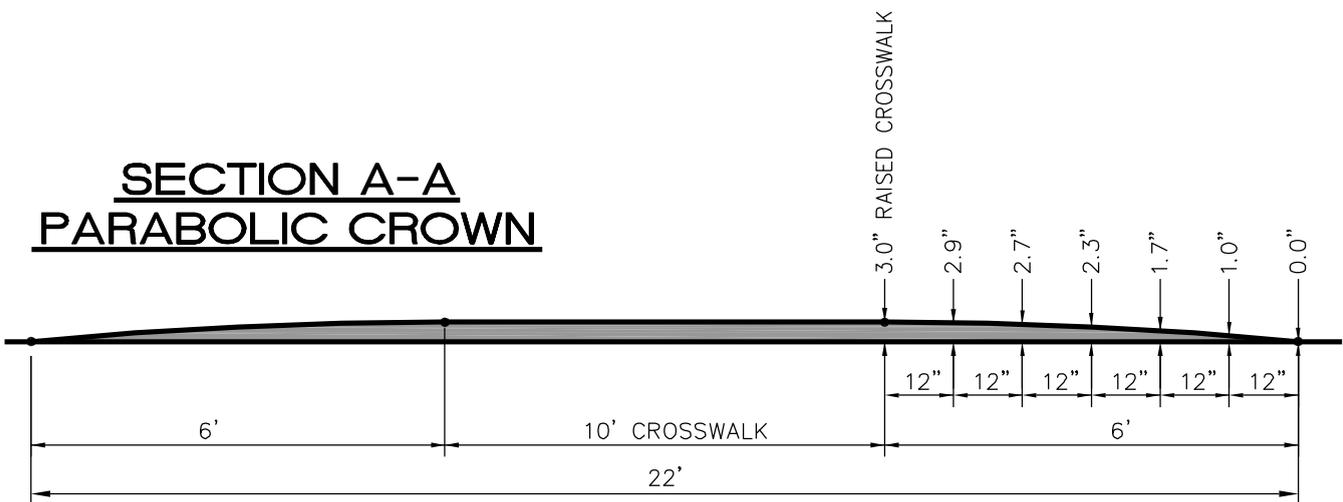

PLAN VIEW

NOTES:

1. Signs and Markings shall be in accordance with the MUTCD.
2. Raised Crosswalks shall be located mid-block (edge of ramp at least 20' from intersection) and shall not be placed over manholes, gate valves, junction boxes, etc.



TOWN of CLAYTON

USE WITH THE TOWN of CLAYTON STANDARD SPECIFICATIONS ONLY

RAISED CROSSWALK INSTALLATION DETAIL

SCALE: Not To Scale	DETAIL # 2407.07
REVISION DATE: July, 2010	SHEET #: 1 of 1