


SECTION AT RIGHT TO CENTERLINE OF PIPE

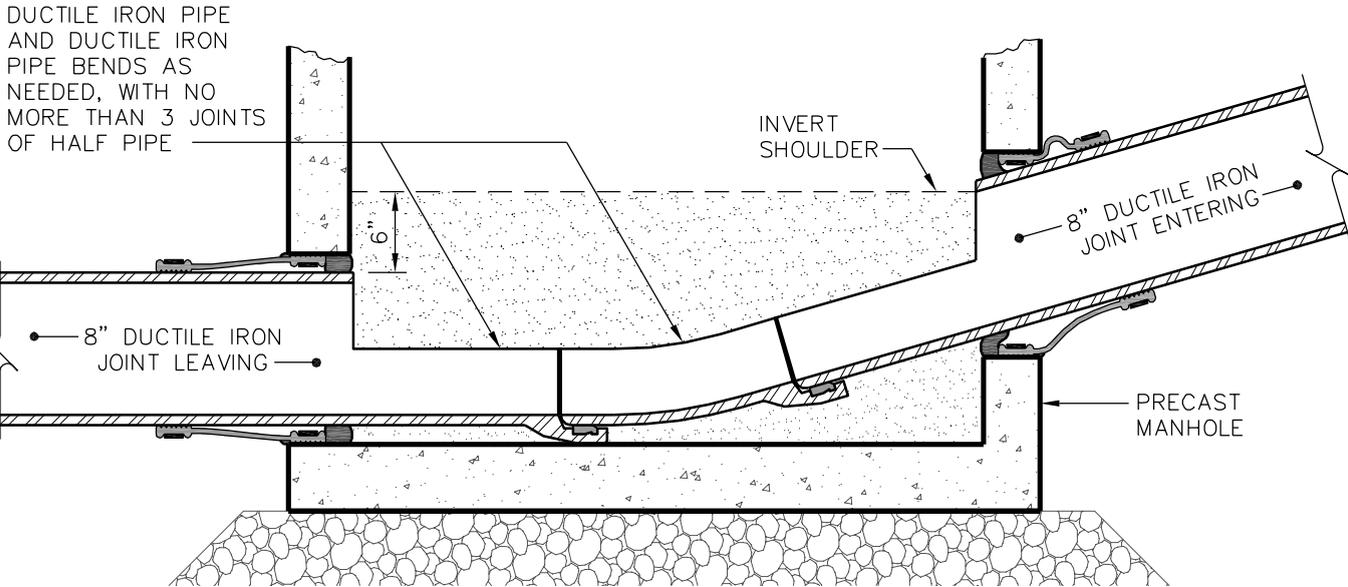

SECTION ALONG CENTERLINE OF PIPE

NOTES:

1. No horizontal alignment change can be made with this manhole type. Use on DIP pipe grades 10% or greater.
2. Concrete strength to be 4,000 PSI minimum.



TOWN of CLAYTON

USE WITH THE TOWN of CLAYTON STANDARD SPECIFICATIONS ONLY

**HIGH VELOCITY
INVERT DETAIL**

SCALE: Not To Scale	DETAIL # 2 532.02
REVISION DATE: July, 2010	SHEET #: 1 of 1